

Design in Frequency Domain


Lect. 9

Presented by

Dr. Mostafa Abdel-Geliel



Relative Stability

- Stability Margins
 - What is the worst perturbation of the transfer function that will make the system marginally stable?
 - Marginal stability for open loop stable systems is when the contour goes through the point $(-1,0)$.

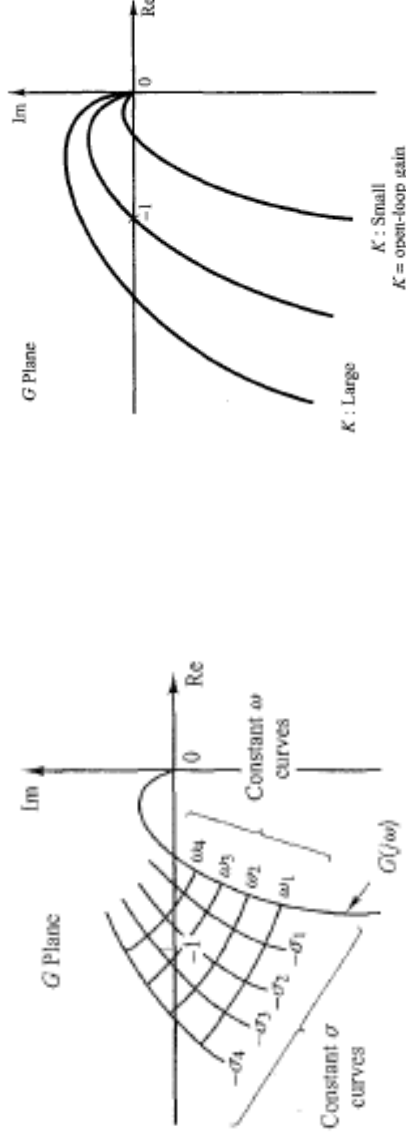


Gain and Phase Margins

- Gain Margin: gain perturbation that makes the system marginally stable.
- Phase Margin: negative phase perturbation that makes the system marginally stable.

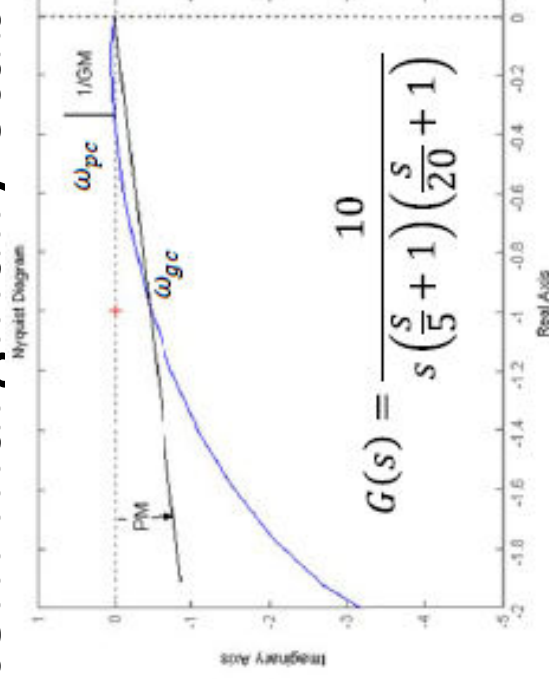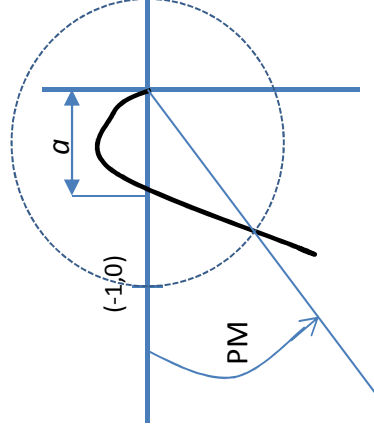

ω_{gc}/ω_{pc} = gain crossover ($M = 1$) / phase crossover ($\phi = -180^\circ$)

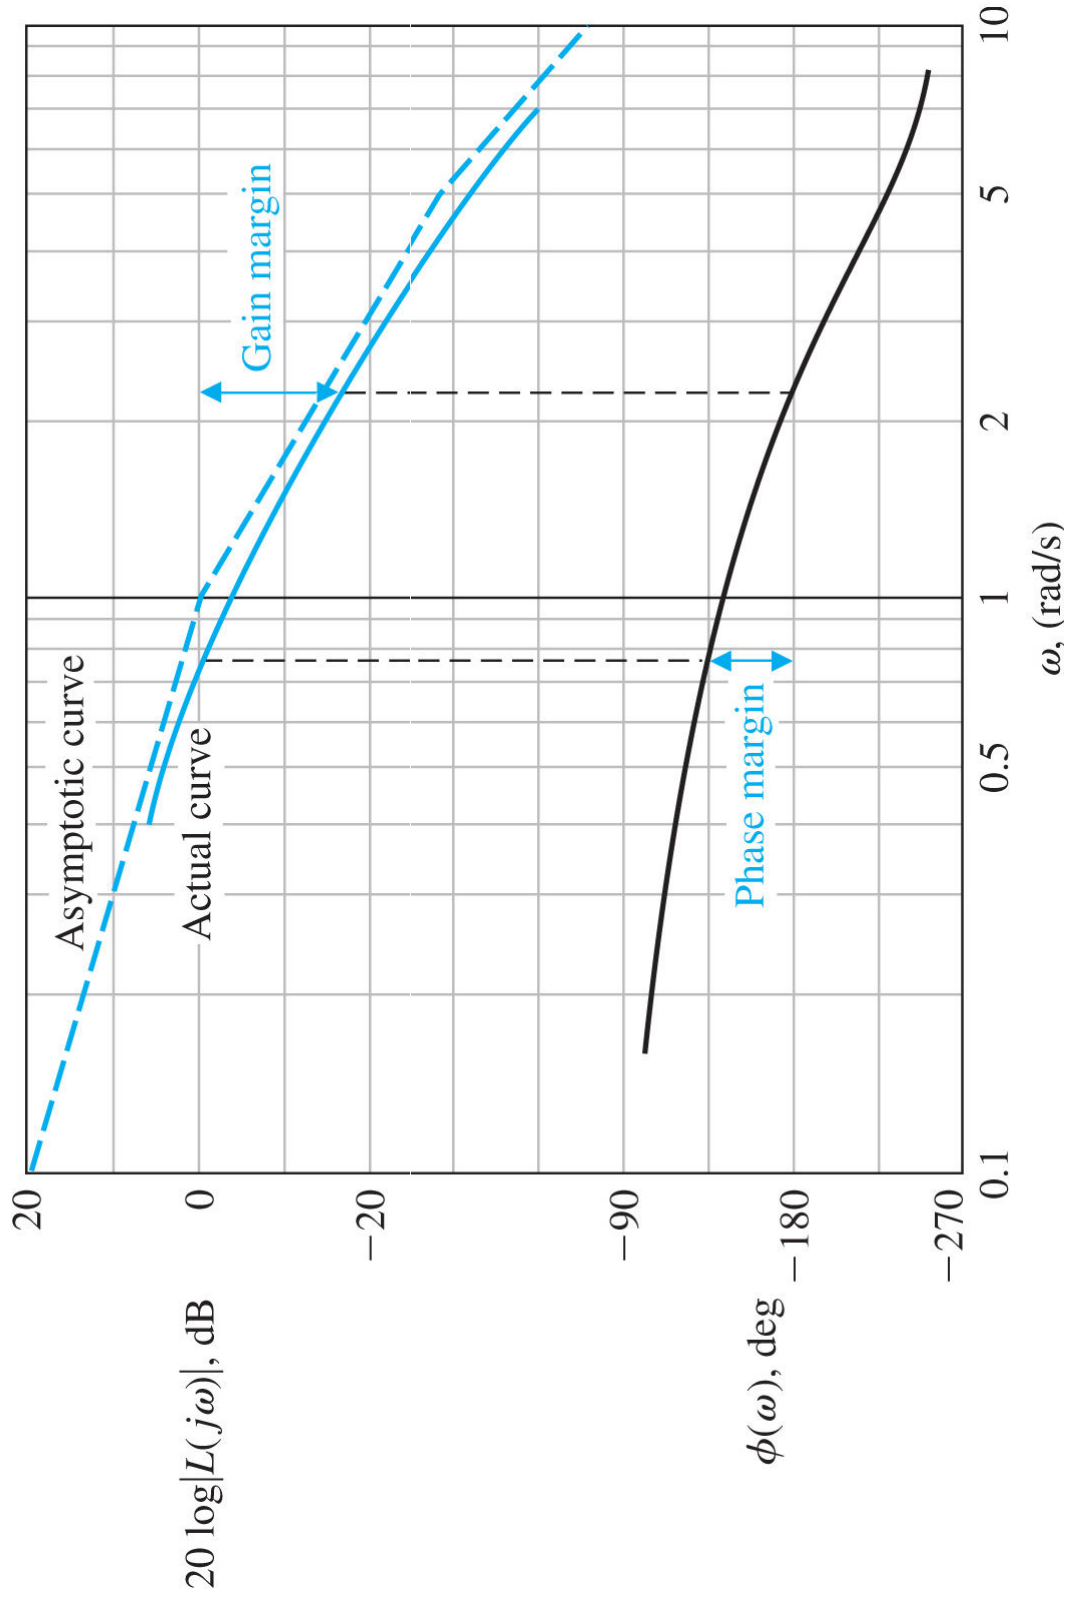

Design Compensator

- The design criteria is to adjust the gain and phase margin (GM and PM)
- GM and PM can be improved using either Lead or Lag compensator
- Discuss the difference between lead and lag properties!!

Lead Compensator Design

- Maximum phase

$$\sin \phi_{\max} = \frac{1 - \alpha}{1 + \alpha}$$


where $\alpha = |z|/|p|$, which implies that

$$\alpha = \frac{1 - \sin \phi_{\max}}{1 + \sin \phi_{\max}}$$

- Frequency of the maximum phase addition is $\omega_{\max} = \sqrt{|z| \cdot |p|}$
 - Usually try to place this near ω_c
- High frequency gain increase is by $1/\alpha$
- So there is a compromise between wanting to add a large amount of phase (α small) and the tendency to generate large gains at high frequency
 - So try to keep $1/\alpha \leq 10$, which means $|p| \leq 10|z|$ and

$$\phi_{\max} \leq 60^\circ$$

$$G_c(s) = K_c \frac{s + z}{s + p}$$

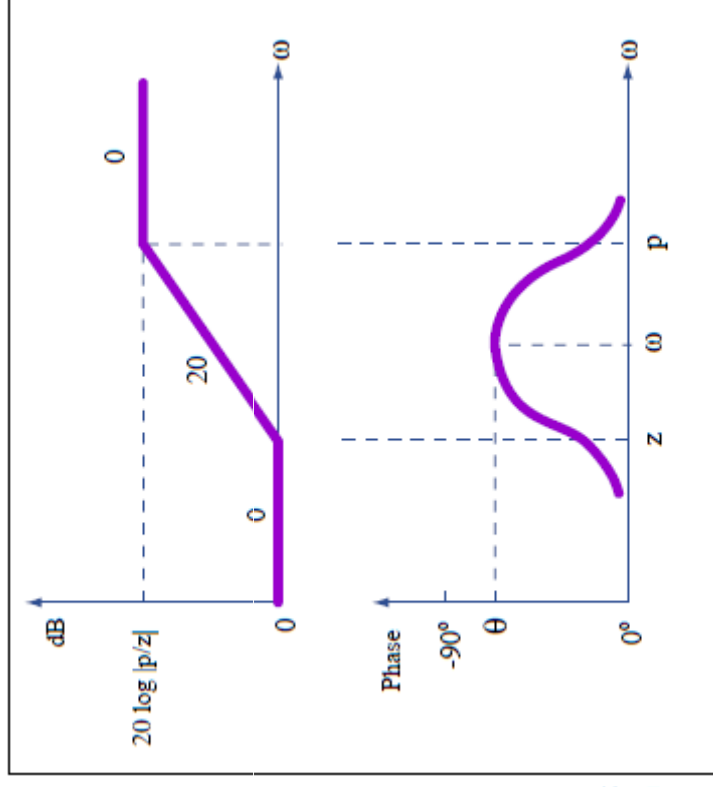

Design lead procedure:

- 1- determine the required specification (error constant, PM and GM)
- 2- Draw Bode plot based on the error constant (gain)

3- Determine the system PM and GM

4- check the PMs of the system with the PMd

5- compute compensator phase angle

$$\phi_{\max} = PM_d - PM_s + \varepsilon$$

$$5 \leq \varepsilon \leq 12^\circ$$

6- compute α : $\alpha = \frac{1 - \sin \phi_{\max}}{1 + \sin \phi_{\max}}$

7- the new gain crossover frequency will be

at LM

$$LM(\omega_m) = 10 \log \alpha$$

8- compute T where $\omega_m = \frac{1}{T\sqrt{\alpha}}$

9- let $z_c = \frac{1}{T}$ and $p_c = \frac{1}{\alpha T}$

